TFS3

series

Product Segments

- **Care Motion**
- **Industrial Motion**

General Features

Maximum available buttons	2
IP rating	Up to IP66
Options	with back up battery or cable less control

Drawing

Standard Dimensions
(mm)

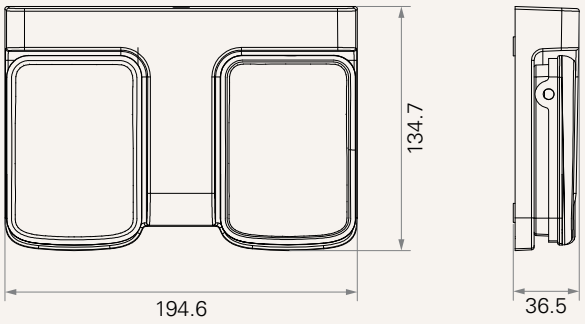

TFS3 Ordering Key

TiMOTION

TFS3

Version: 20190729-E

	Connection	0 = Wireless (Frequency: 2.4G)		1 = Cable (Straight, 1500mm)
	Plug	0 = Without (Wireless version)		5 = RJ 10P, 180°
		1 = DIN 8P, 90°		6 = Flat RJ 10P, 180°
		2 = RJ 10P, 90°		7 = Short DIN 5P
		4 = DIN 8P, 180°		8 = Long DIN 5P
	Color	1 = Black		3 = White upper cover, Pantone 428C for keypad (Standard)
		2 = Grey (Pantone 428C)		
	Button Definition	1 = Left key: Extend / Right key: Retract		2 = Left key: Retract / Right key: Extend
	Which Motor to Control	1 = 1	3 = 3	5 = 5
		2 = 2	4 = 4	6 = 6
	Built-in Backup Battery	0 = Without battery shrapnel, without battery		
		1 = With battery shrapnel, with battery (2*AAA 1.5V dry batteries)		
		2 = With battery shrapnel, without battery		
	IP Rating	0 = Without	1 = IP54	2 = IP66
	Control Box Type	0 = Without MCU + Without MCU control box		3 = With MCU + With MCU control box
		1 = With MCU + Without MCU control box		D = Direct cut (only supplied by "cable" option in connection section)
		2 = Without MCU + With MCU control box		

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application.
TiMOTION products are subject to change without prior notice.