



Roller chains with attachments



Straight attachment 1 side 2 holes
WSA-2

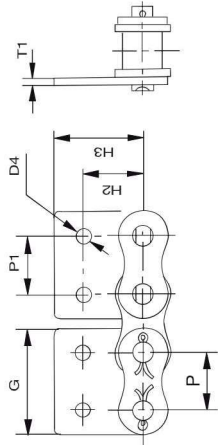

Straight attachment 2 sides 2 holes
WSK-2




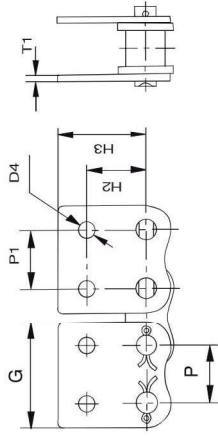


Roller chains with extended pins



Every 2 Pitches

Every Pitches

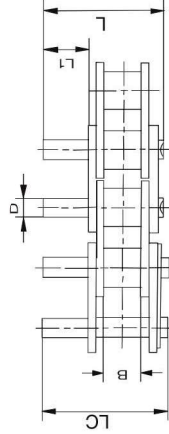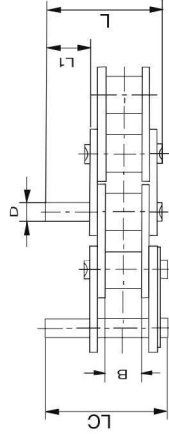

Roller chains with attachments standard ISO / B series

Reference DIN/ISO	P mm	G mm	P1 mm	H2 mm	H3 mm	T1 mm	D4 mm
*06B	9,525	17,65	9,525	9,52	13,50	1,30	3,5
08B	12,700	23,30	12,700	13,35	18,90	1,60	4,3
10B	15,875	29,58	15,875	16,50	22,95	1,70	5,3
12B	19,050	34,05	19,050	21,45	28,60	1,85	6,4
16B	25,400	46,40	25,400	23,15	34,00	3,10	6,4
20B	31,750	58,10	31,750	30,50	45,70	3,50	9,0
24B	38,100	71,30	38,100	42,70	61,50	4,80	10,5

* Straight plates
Also available in stainless steel

Roller chains with attachments special

Reference DIN/ISO	P mm	G mm	P1 mm	H2 mm	H3 mm	T1 mm	D4 mm
*06B	9,525	17,75	9,525	9,5	13,5	1,30	3,5
08B	12,700	24,2	12,700	14,1	19,5	1,60	4,3
10B	15,875	29,9	15,875	16,2	23,2	1,70	5,3
12B	19,050	35,25	19,050	18,2	28,1	1,85	6,4
16B	25,400	45	25,400	25,4	37,35	3,10	8,2
20B	31,750	58	31,750	31,75	50	3,50	9
24B	38,100	72	38,100	36,51	55	4,80	11

* Straight plates
Also available in stainless steel

For other measures, please consult

Reference DIN/ISO	P mm	B mm	D mm	L1 mm	L mm	Lc mm
*06B	9,525	5,72	3,28	11,3	23,4	24,4
08B	12,700	7,75	4,45	15,5	31,2	32,2
10B	15,875	9,65	5,08	17,8	36,1	37,5
12B	19,050	11,68	5,72	20,7	42,0	43,6
16B	25,400	17,02	8,28	33,2	68,0	69,3

* Straight plates
Also available in stainless steel

For other measures, please consult